

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2002-068351

(43)Date of publication of application : 08.03.2002

(51)Int.Cl.

B65D 85/57  
G11B 23/03

(21)Application number : 2000-260669

(71)Applicant : YONEYAMA KOICHI

(22)Date of filing : 30.08.2000


(72)Inventor : YONEYAMA KOICHI

## (54) DISK HOUSING CASE

## (57)Abstract:

**PROBLEM TO BE SOLVED:** To provide a disk housing case which has approximately the same maximum dimension as a conventional case in the circulation stage while equipped with a disk discharging means, which discharges a disk from a case side surface, and a combining means for the cases to each other, and in addition, by which, the disk can be taken out from the case side surface without rubbing the information recorded surface.

**SOLUTION:** A combining member 4 is turnably provided on the opposite side from the disk discharging surface side of the case 1.

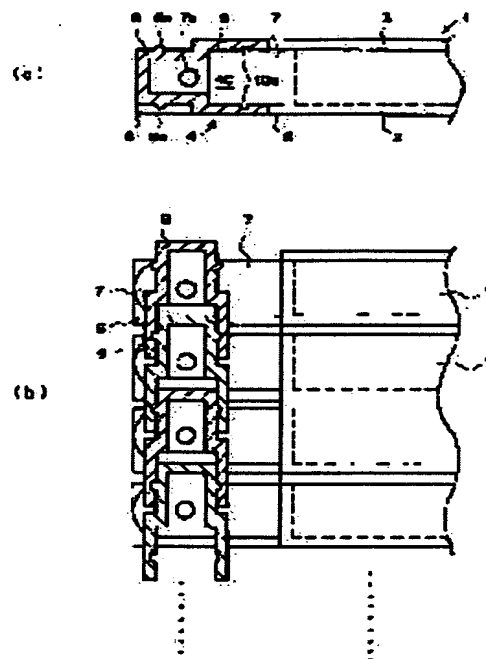

## LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office

## \* NOTICES \*

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

## CLAIMS

---

### [Claim(s)]

[Claim 1] The disk discharge side-face side of said case is the disk receipt case where it is characterized by to consist of bond part material by which it was prepared rotatable [ said coupling means / to the opposite side ] in a disk receipt case with the flat abbreviation square which comes to have the coupling means which can carry out connection association of two or more cases in the mode which the principal planes of the case which adjoins a disk discharge means make a disk discharge from a case side face were made to counter removable.

[Claim 2] The disk receipt case according to claim 1 characterized by supporting said bond part material rotatable between the 1st location suitable for circulation of said case, and the 2nd location suitable for association with the bond part material of the case where it adjoins.

[Claim 3] The disk receipt case according to claim 2 characterized by being constituted so that said bond part material may carry out concavo-convex fitting elastically to the bond part material of the case which adjoins in said 2nd location.

[Claim 4] The disk receipt case according to claim 1 to 3 characterized by the rail for disk guidance to which it shows this disk in the mode which can avoid that the information recording surface of this disk contacts a case internal surface at the time of disk discharge being installed by said case.

[Claim 5] The disk receipt case according to claim 1 to 4 where said disk discharge means is characterized by having the disk discharge member which engages with the edge of the opposite side with said disk discharge side-face side of the disk held in said case, and the control lever which moves this disk discharge member and makes said disk discharge out of a case.


[Claim 6] Said control lever is a disk receipt case according to claim 5 characterized by being attached movable in said case at said case between the stowed position contained completely, the position in readiness which made the point for actuation project from said disk discharge side face to the method of outside, and the disk discharge location which makes said disk discharge out of a case.



[Claim 7] The disk receipt case according to claim 6 characterized by preparing a door in said disk discharge side face possible [ closing motion ], and for this door being pushed open by this control lever with the actuation to said disk discharge location from said position in readiness of said control lever, and being constituted so that discharge of said disk may be permitted.

---

[Translation done.]




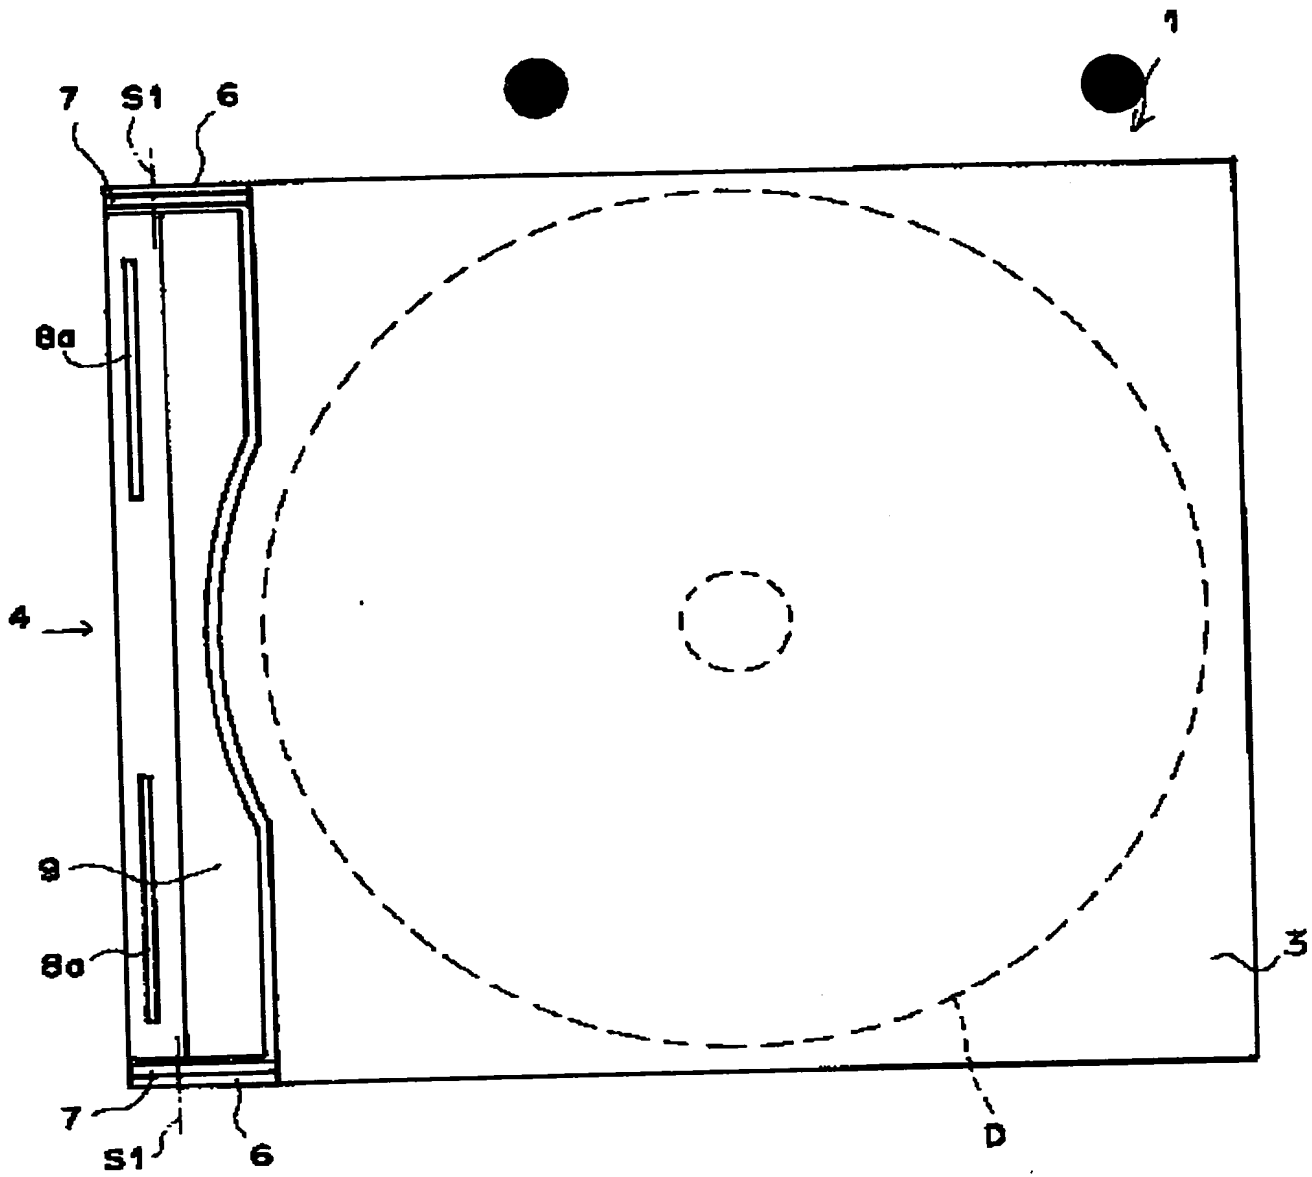

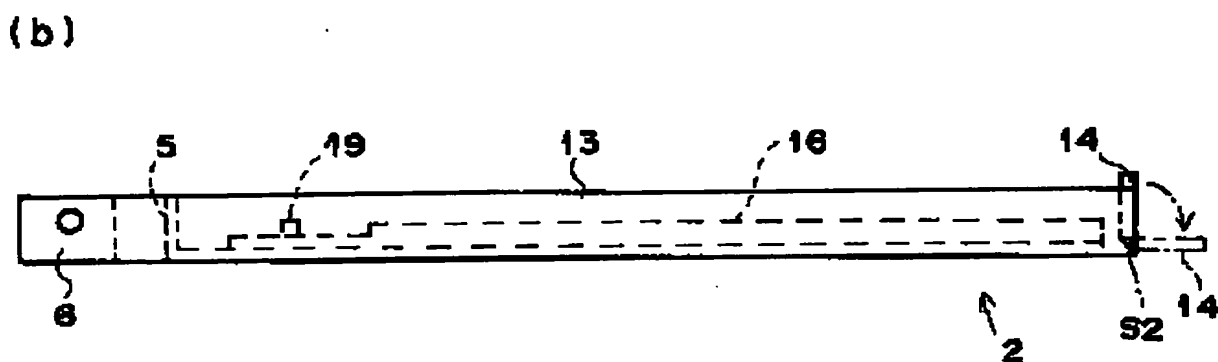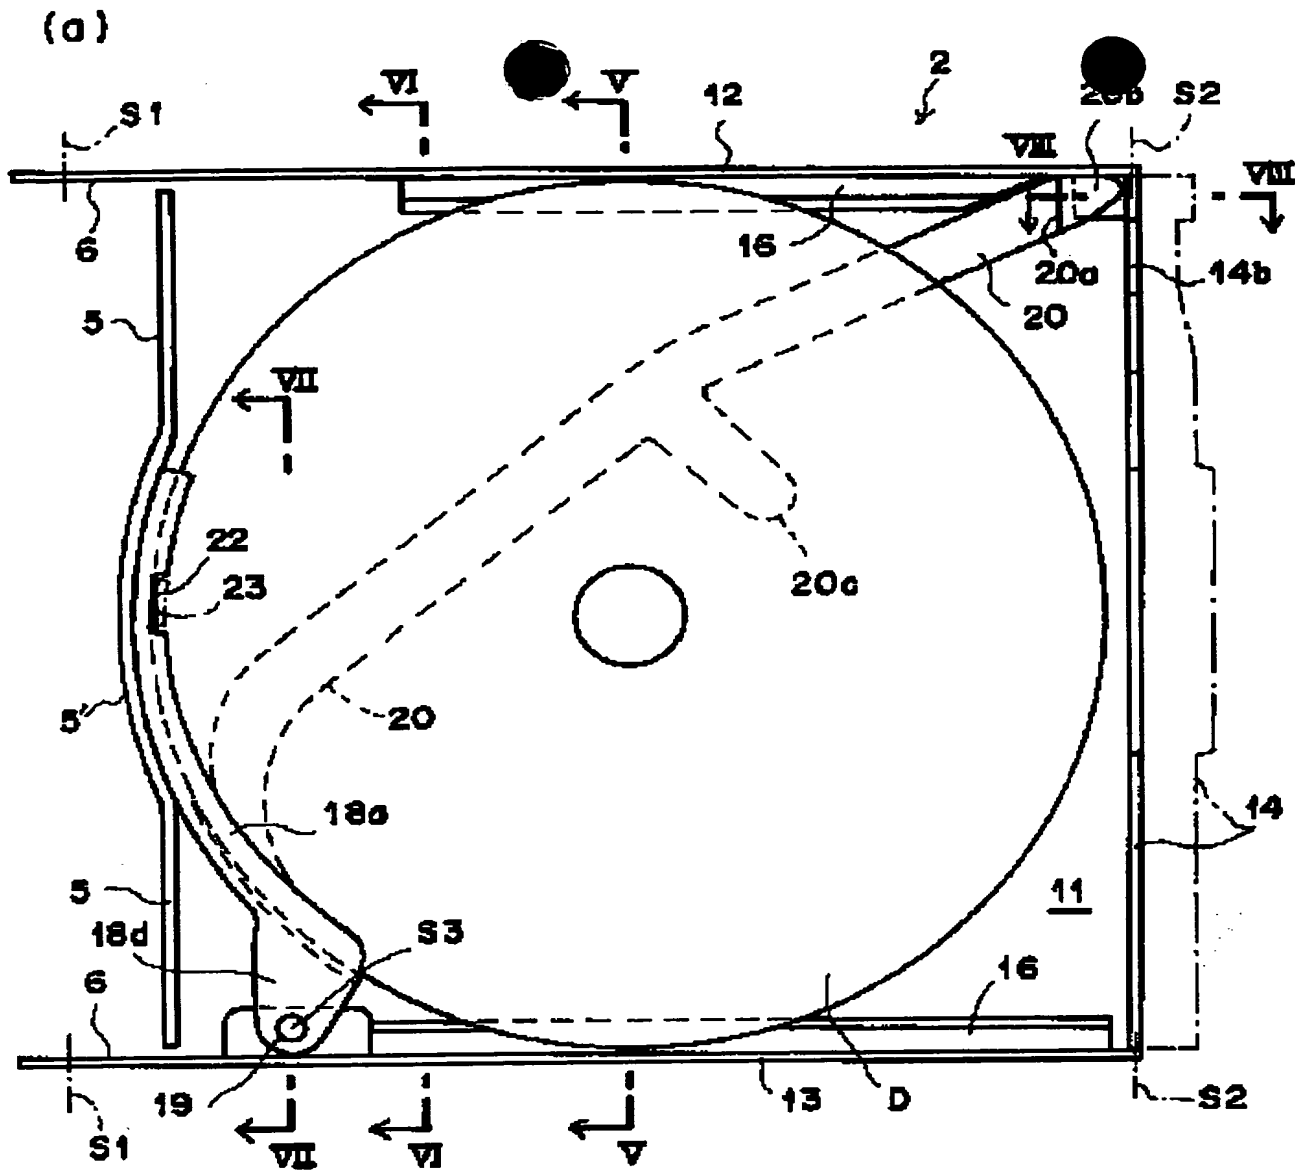




Drawing selection drawing 5

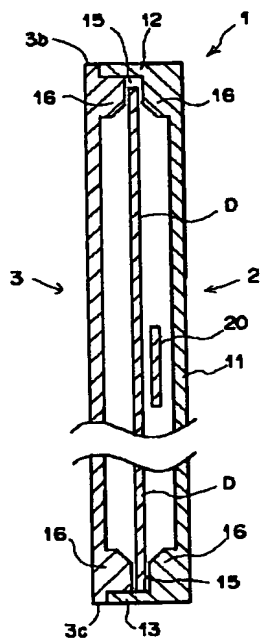


[Translation done.]

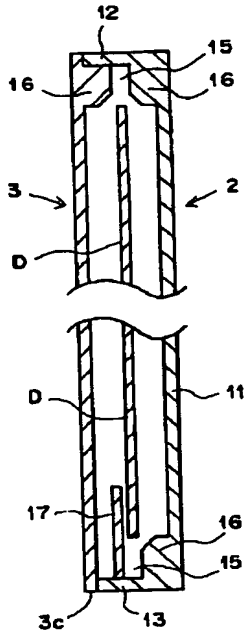


[Translation done.]



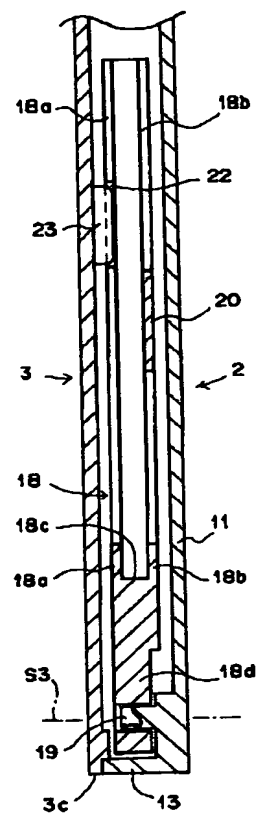


[Translation done.]


Drawing selection drawing 8



[Translation done.]

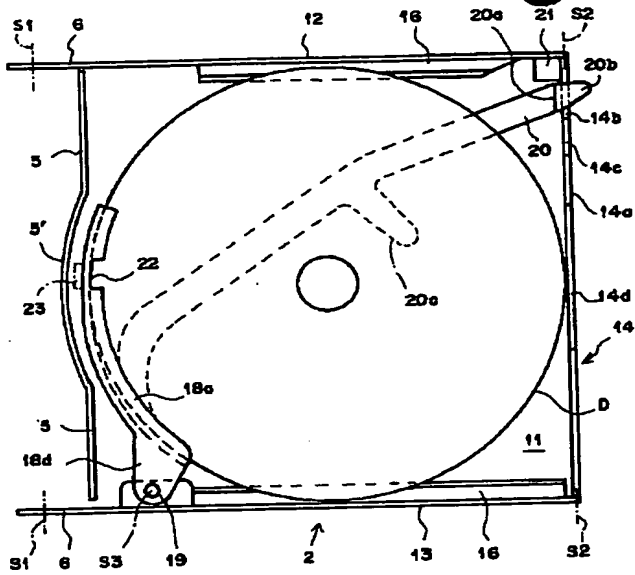


[Translation done.]

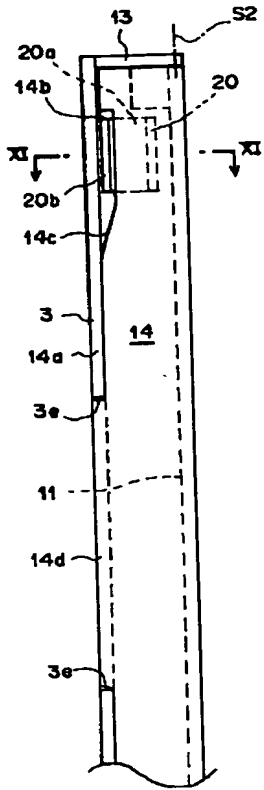


[Translation done.]


Drawing selection ☐ drawing 11 ☒

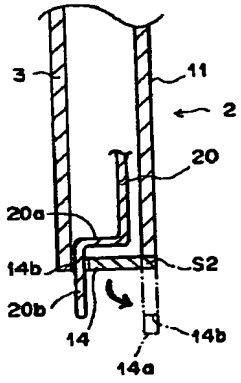

[Translation done.]

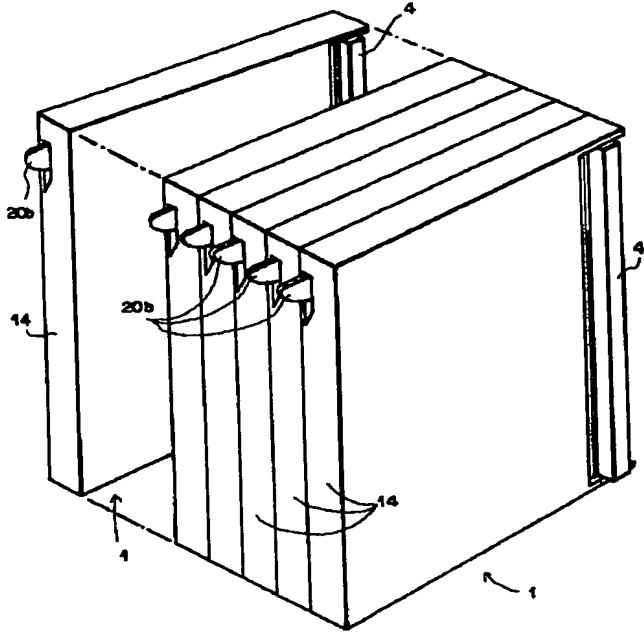

[Translation done.]

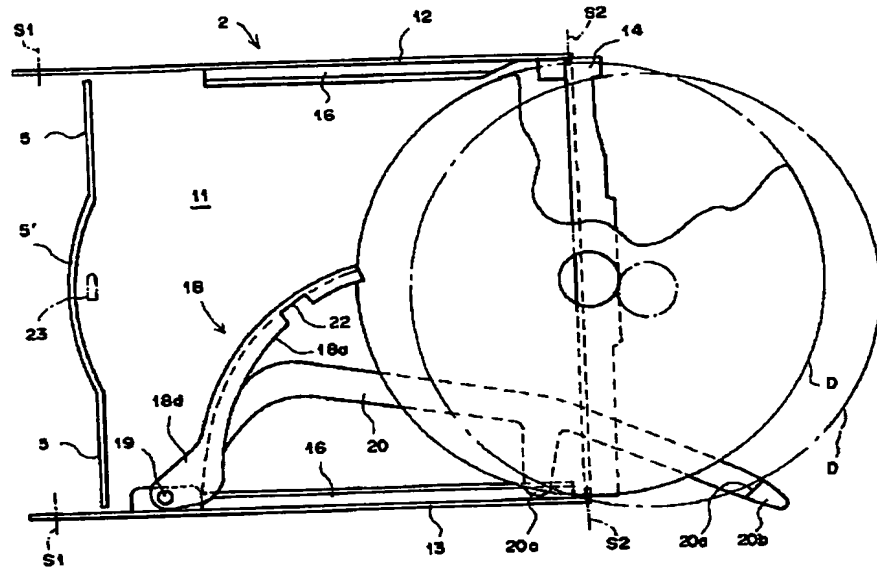Drawing selection drawing 13

[Translation done.]